



**Lightolier 3D Shine Series Track Head** offers specification grade beam performance with Signify optics. AccuRender technology provides the highest color quality at the highest efficacy. With a sleek, integrated hinge and internal driver for a contemporary appearance, Shine 3D Printed Track Heads are positioned closer to the ceiling for a cleaner look and design. Made with renewable materials, the Shine Series offers a range of color, beam, lumen, and temperature options, and is ideal in retail, hospitality, and office environments.

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Fixture

Now including AccuRender technology for the highest color quality at the highest efficacy.

example: 3DTHSN M L WHST LF 15L RF 30K

Series	Size	Adapters	Housing Colors	Textures	Lumens	Reflector / Beam Spreads	CRI / CCT
<b>3DTHSN</b>	<b>M</b>			<b>LF</b>			
3DTHSN Shine Series	M Medium	L Lightolier J Juno H Halo	<u>Satin Essentials</u> BKST Black GYST Grey WHST White	LF Layered Fine	10L 1000lm 15L 1500lm 23L 2300lm	RS Spot (17°) RNF Narrow Flood (22°) RF Flood (34°) RWF Wide Flood (60°)	27K 90 CRI / 2700K 30K 90 CRI / 3000K 35K 90 CRI / 3500K 40K 90 CRI / 4000K

Note:

### Features

- Customizable:** choose from a wide variety of configurations.
- Sustainable:** 3D Printed products produce less carbon emissions when compared to traditional, conventional luminaires.
- Local production:** Printed and assembled in Littlestown, PA.
- Quick delivery:** Created on demand and shipped in weeks.
- Lifetime:** L90/B50 Lumen Maintenance at 66,000 hours and L70/B50 >110,000 hours.

### Dimming Compatibility

**Trailing edge (ELV) dimming compatible**  
**SELV-300P** Lutron Skylark (100-7%)  
**DVELV-300P** Lutron Diva (100-7%)  
**6615-P** Leviton Decora (100-12%)

### Electrical

**Efficacy:** Up to 120 lm/W  
**Track Mount:** Standard Lightolier track adapter  
**Input Voltage:** 120V  
**Frequency:** 50/60Hz  
**Power Factor:** 0.9  
**Control:** ELV dimming

### Mounting

**Track Adapters:** Lightolier, Juno or Halo mounting track options  
**Horizontal rotation:** 350°  
**Vertical tilt:** 90°

### Labels

cULus listed, 5 year warranty, IP20, RoHS & DLC Premium rated Declare. LBC Red List Approved.

This product is manufactured in one of our US factories and, as of the date of this document, this product was considered a commercially available off-the-shelf (COTS) item meeting the requirements of the BAA. This BAA designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies. Prior to ordering, please visit [www.signify.com/baa](http://www.signify.com/baa) to view a current list of BAA-compliant products to confirm this product's current compliance.



Unleash your inner creator

Learn more about this product, scan the QR Code with your smartphone or visit us at: [www.signify.com/en-us/brands/lightolier/3d-printed-lighting/products/crown-series](http://www.signify.com/en-us/brands/lightolier/3d-printed-lighting/products/crown-series)

Declare.



interact ready.

# Shine Series

3D Track Heads (1000lm, 1500lm, 2300lm)

## AccuRender Technology (CRI 90+)

The right light brings colors to life. Our new AccuRender technology helps ensure colors are rendered more accurately and consistently, while doing so as efficiently as CRI 80 products.



**Standard CRI 80**

Good color rendering and high efficacy



**Standard CRI 90**

Better color rendering and low efficacy



**AccuRender**

Best color rendering, color preference and high efficacy

### Promote savings

#### High efficacy, with no penalty:

- Energy efficacy compares well to conventional CRI80
- Up to 25% more energy savings vs competitor CRI90<sup>1</sup>
- Helps you meet Title 24 requirements

### Enjoy design flexibility

#### Full range of products and options:

- Available soon in across Lightolier portfolio for application flexibility
- Multiple CCTs and lumen packages offered

1. Based on comparison of published specification sheet data, most competitor offerings reflect a 15 to 25% efficacy loss for CRI 90 compared to CRI 80, while Lightolier AccuRender results in only ≤5% drop compared to CRI 80.

### Bolster wellbeing

#### High MDER:

- AccuRender has a Melanopic Daylight Efficacy Ratio up to 0.80
- Helps support Circadian Rhythm<sup>2</sup>
- Earns points towards WELL Building Standard

### Contribute to productivity

#### High MDER:

- Supports daytime vitality<sup>3</sup> and alertness<sup>4</sup>
- Supports mood, thermo-regulation, and learning centers in the brain<sup>5</sup>
- May positively influence work engagement by helping make the environment more attractive<sup>6</sup>

2. Czeisler, 1999; Dijk & Archer, 2009; Lucas 2012, 2019

3. Partonen 2000

4. Viola 2008, Smolders 2012; Geerdink 2017

5. Fernandez 2018; Rupp, 2019

### Show your true colors

#### High color rendering:

- **CRI:**  
R<sub>a</sub> up to 94, R<sub>9</sub> up to 67, G<sub>a</sub> up to 99, C<sub>9</sub> up to 94
- **TM-30:**  
R<sub>t</sub> up to 92, R<sub>f,hi</sub> up to 91, R<sub>g</sub> up to 100, R<sub>cs,hi</sub> up to -5%
- **True to life colors** to help energize your environment and render better flesh tones critical for Healthcare, Hospitality and Retail

### Achieve color balance

#### Best in class color consistency:

- ≤ 2 SDCM promotes aesthetic harmony

6. Veitch, Jennifer & Stokkermans, Mariska & R. Newsham, Guy. (2013). Linking Lighting Appraisals to Work Behaviors. Environment and Behavior. 45. 198-214. 10.1177/0013916511420560.

# Shine Series

3D Track Heads (1000lm, 1500lm, 2300lm)

## Colors


Housing Color  
BKST Black

Housing Color  
GYST Grey

Housing Color  
WHST White



## Dimensions

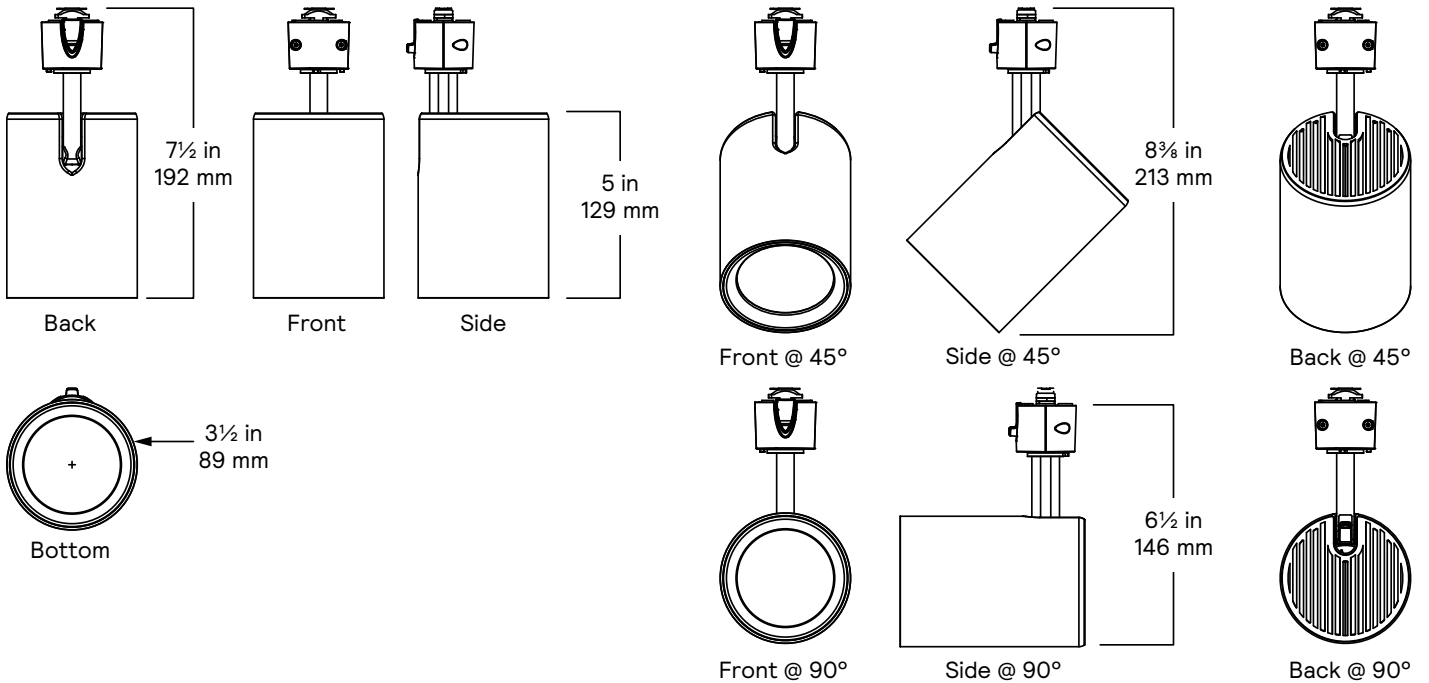


# Shine Series

## 3D Track Heads (1000lm)

### Aiming Angles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam. Data shown is for 3000K, use the table on the right for CRI/CCT adjustment factors.


D Distance  
L Beam length  
W Beam Width  
A Aiming Angle  
C Distance to center beam  
FC Footcandles  
CBCP Center Beam Candlepower

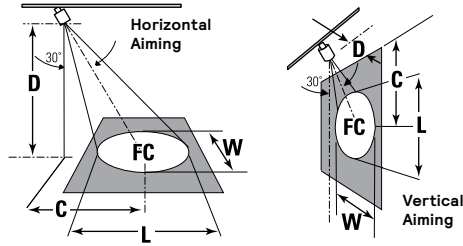

### Adjustment factors

CCT (90CRI)

4000K = 108%  
3500K = 106%  
3000K = 100%  
2700K = 96%

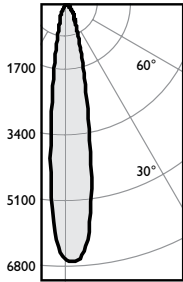

### Spot (RS)

3DTHSN M L WHST LF 10L RS 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 1055 lms  
Input watts<sup>2</sup>: 8.8 W  
Efficacy: 119.9 lm/w  
CRI: 90 min  
CBCP: 6,764 cd

Beam Angle: 17°

CERTIFIED TEST REPORT NO. ES 3DTHL RS 3.0 930 1000lm

### 30° Aiming Angle


Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	122	2.4	2.1
8	4.6	69	3.2	2.8
10	5.8	44	4.0	3.5
12	6.9	31	4.8	4.1

### 30° Aiming Angle

Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	211	2.6	1.2
3	5.2	94	3.8	1.8
4	6.9	53	5.1	2.4
5	8.7	34	6.4	3.0

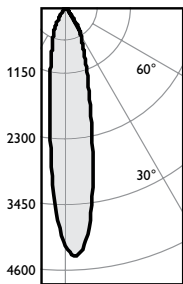

### Narrow Flood (RNF)

3DTHSN M L WHST LF 10L RNF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 1040 lms  
Input watts<sup>2</sup>: 8.8 W  
Efficacy: 118.2 lm/w  
CRI: 90 min  
CBCP: 4,546 cd

Beam Angle: 22°

CERTIFIED TEST REPORT NO. IES 3DTHL RNF 3.0 930 1000lm

### 30° Aiming Angle


Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	82	3.1	2.7
8	4.6	46	4.2	3.6
10	5.8	30	5.2	4.5
12	6.9	21	6.3	5.4

### 30° Aiming Angle

Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	142	3.5	1.6
3	5.2	63	5.3	2.3
4	6.9	36	7.0	3.1
5	8.7	23	8.8	3.9

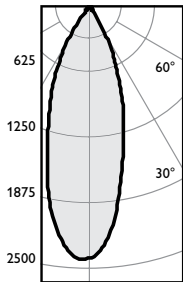

### Medium Flood (RMF)

3DTHSN M L WHST LF 10L RMF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 1017 lms  
Input watts<sup>2</sup>: 8.8 W  
Efficacy: 115.6 lm/w  
CRI: 90 min  
CBCP: 2,446 cd

Beam Angle: 34°

CERTIFIED TEST REPORT NO. 3DTHL RF 3.0 930 1000lm

### 30° Aiming Angle


Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	44	5.0	4.2
8	4.6	25	6.7	5.6
10	5.8	16	8.4	7.1
12	6.9	11	10.1	8.5

### 30° Aiming Angle

Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	76	6.8	2.4
3	5.2	34	10.2	3.7
4	6.9	19	13.6	4.9
5	8.7	12	17.0	6.1

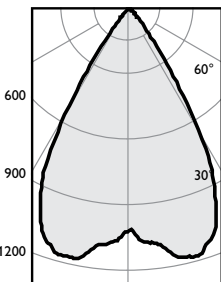

### Flood (RWF)

3DTHSN M L WHST LF 10L RWF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 1048 lms  
Input watts<sup>2</sup>: 8.8 W  
Efficacy: 119.1 lm/w  
CRI: 90 min  
CBCP: 1,181 cd

Beam Angle: 59°

CERTIFIED TEST REPORT NO. 3DTHL RWF 3.0 930 1000lm

### 30° Aiming Angle

Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	21	10.1	7.8
8	4.6	12	13.5	10.5
10	5.8	8	16.9	13.1
12	6.9	5	20.3	15.7

### 30° Aiming Angle

Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	37	228.0	4.5
3	5.2	16	342.0	6.8
4	6.9	9	456.0	9.1
5	8.7	6	570.0	11.3

1. Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

2. Wattage controlled to within +/- 5%.

Note: Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.


# Shine Series

## 3D Track Heads (1500lm)

### Aiming Angles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam. Data shown is for 3000K, use the table on the right for CRI/CCT adjustment factors.


D Distance  
L Beam length  
W Beam Width  
A Aiming Angle  
C Distance to center beam  
FC Footcandles  
CBCP Center Beam Candlepower

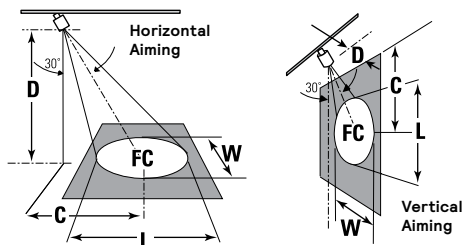

### Adjustment factors

CCT (90CRI)

4000K = 108%  
3500K = 106%  
3000K = 100%  
2700K = 96%

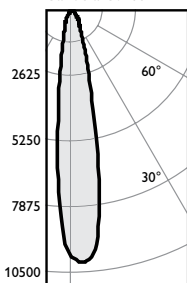

### Spot (RS)

#### 3DTHSN M L WHST LF 15L RS 30K

CCT <sup>1</sup> :	3000K
Output lumens:	1571 lms
Input watts <sup>2</sup> :	13.4 W
Efficacy:	117.2 lm/w
CRI:	90 min
CBCP:	10,070 cd

Beam Angle: 17°


CERTIFIED TEST REPORT NO. ES 3DTHL RS 3.0 930 1500lm

#### 30° Aiming Angle Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	182	2.4	2.1
8	4.6	102	3.2	2.8
10	5.8	65	4.0	3.5
12	6.9	45	4.8	4.1

#### 30° Aiming Angle Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	315	2.6	1.2
3	5.2	140	3.8	1.8
4	6.9	79	5.1	2.4
5	8.7	50	6.4	3.0

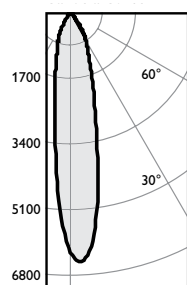

### Narrow Flood (RNF)

#### 3DTHSN M L WHST LF 15L RNF 30K

CCT <sup>1</sup> :	3000K
Output lumens:	1548 lms
Input watts <sup>2</sup> :	13.4 W
Efficacy:	115.5 lm/w
CRI:	90 min
CBCP:	6,768 cd

Beam Angle: 22°


CERTIFIED TEST REPORT NO. IES 3DTHL RNF 3.0 930 1500lm

#### 30° Aiming Angle Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	122	3.1	2.7
8	4.6	69	4.2	3.6
10	5.8	44	5.2	4.5
12	6.9	31	6.3	5.4

#### 30° Aiming Angle Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	212	3.5	1.6
3	5.2	94	5.3	2.3
4	6.9	53	7.0	3.1
5	8.7	34	8.8	3.9

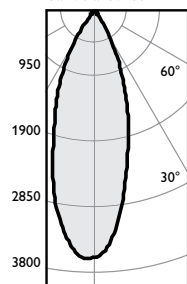

### Medium Flood (RMF)

#### 3DTHSN M L WHST LF 15L RMF 30K

CCT <sup>1</sup> :	3000K
Output lumens:	1515 lms
Input watts <sup>2</sup> :	13.4 W
Efficacy:	113.1 lm/w
CRI:	90 min
CBCP:	3,642 cd

Beam Angle: 34°


CERTIFIED TEST REPORT NO. 3DTHL RF 3.0 930 1500lm

#### 30° Aiming Angle Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	66	5.0	4.2
8	4.6	37	6.7	5.6
10	5.8	24	8.4	7.1
12	6.9	16	10.1	8.5

#### 30° Aiming Angle Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	114	6.8	2.4
3	5.2	51	10.2	3.7
4	6.9	28	13.6	4.9
5	8.7	18	17.0	6.1

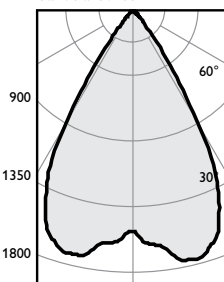

### Flood (RWF)

#### 3DTHSN M L WHST LF 15L RWF 30K

CCT <sup>1</sup> :	3000K
Output lumens:	1561 lms
Input watts <sup>2</sup> :	13.4 W
Efficacy:	116.5 lm/w
CRI:	90 min
CBCP:	1,759 cd

Beam Angle: 59°

CERTIFIED TEST REPORT NO. 3DTHL RWF 3.0 930 1500lm

#### 30° Aiming Angle Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	32	10.1	7.8
8	4.6	18	13.5	10.5
10	5.8	11	16.9	13.1
12	6.9	8	20.3	15.7

#### 30° Aiming Angle Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	55	228.0	4.5
3	5.2	24	342.0	6.8
4	6.9	14	456.0	9.1
5	8.7	9	570.0	11.3

1. Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

2. Wattage controlled to within +/- 5%.

Note: Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.


# Shine Series

## 3D Track Heads (2300lm)

### Aiming Angles


L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam. Data shown is for 3000K, use the table on the right for CRI/CCT adjustment factors.

D Distance  
L Beam length  
W Beam Width  
A Aiming Angle  
C Distance to center beam  
FC Footcandles  
CBCP Center Beam Candlepower

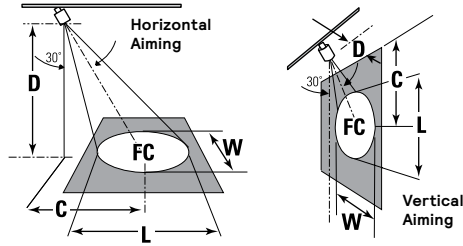

### Adjustment factors

CCT (90CRI)  
4000K = 108%  
3500K = 106%  
3000K = 100%  
2700K = 96%

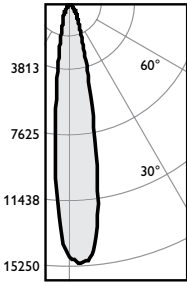

### Spot (RS)

#### 3DTHSN M L WHST LF 23L RS 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 2344 lms  
Input watts<sup>2</sup>: 19.6 W  
Efficacy: 119.6 lm/w  
CRI: 90 min  
CBCP: 15,030 cd

Beam Angle: 17°

CERTIFIED TEST REPORT NO. ES 3DTHL RS 3.0 930 2300lm

### 30° Aiming Angle


#### Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	271	2.4	2.1
8	4.6	153	3.2	2.8
10	5.8	98	4.0	3.5
12	6.9	68	4.8	4.1

### 30° Aiming Angle

#### Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	470	2.6	1.2
3	5.2	209	3.8	1.8
4	6.9	117	5.1	2.4
5	8.7	75	6.4	3.0

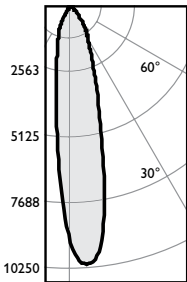

### Narrow Flood (RNF)

#### 3DTHSN M L WHST LF 23L RNF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 2311 lms  
Input watts<sup>2</sup>: 19.6 W  
Efficacy: 117.9 lm/w  
CRI: 90 min  
CBCP: 10,102 cd

Beam Angle: 22°

CERTIFIED TEST REPORT NO. IES 3DTHL RNF 3.0 930 2300lm

### 30° Aiming Angle


#### Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	182	3.1	2.7
8	4.6	103	4.2	3.6
10	5.8	66	5.2	4.5
12	6.9	46	6.3	5.4

### 30° Aiming Angle

#### Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	316	3.5	1.6
3	5.2	140	5.3	2.3
4	6.9	79	7.0	3.1
5	8.7	51	8.8	3.9

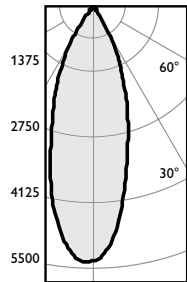

### Medium Flood (RMF)

#### 3DTHSN M L WHST LF 23L RMF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 2261 lms  
Input watts<sup>2</sup>: 19.6 W  
Efficacy: 115.4 lm/w  
CRI: 90 min  
CBCP: 5,436 cd

Beam Angle: 34°

CERTIFIED TEST REPORT NO. 3DTHL RF 3.0 930 2300lm

### 30° Aiming Angle


#### Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	98	5.0	4.2
8	4.6	55	6.7	5.6
10	5.8	35	8.4	7.1
12	6.9	25	10.1	8.5

### 30° Aiming Angle

#### Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	170	6.8	2.4
3	5.2	76	10.2	3.7
4	6.9	42	13.6	4.9
5	8.7	27	17.0	6.1

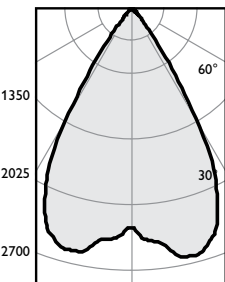

### Flood (RWF)

#### 3DTHSN M L WHST LF 23L RWF 30K

CCT<sup>1</sup>: 3000K  
Output lumens: 2330 lms  
Input watts<sup>2</sup>: 19.6 W  
Efficacy: 118.9 lm/w  
CRI: 90 min  
CBCP: 2,625 cd

Beam Angle: 59°

CERTIFIED TEST REPORT NO. 3DTHL RWF 3.0 930 2300lm

### 30° Aiming Angle

#### Horizontal Illuminance on floor

D	C	F.C.	L	W
6	3.5	47	10.1	7.8
8	4.6	27	13.5	10.5
10	5.8	17	16.9	13.1
12	6.9	12	20.3	15.7

### 30° Aiming Angle

#### Vertical Illuminance on floor

D	C	F.C.	L	W
2	3.5	82	228.0	4.5
3	5.2	36	342.0	6.8
4	6.9	21	456.0	9.1
5	8.7	13	570.0	11.3

1. Correlated Color Temperature within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

2. Wattage controlled to within +/- 5%.

Note: Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.